




180° UTP Keystone jack Cat5e/Cat.6/Cat.6A available,(With LED)



CAT.5e
CAT.6
CAT.6A

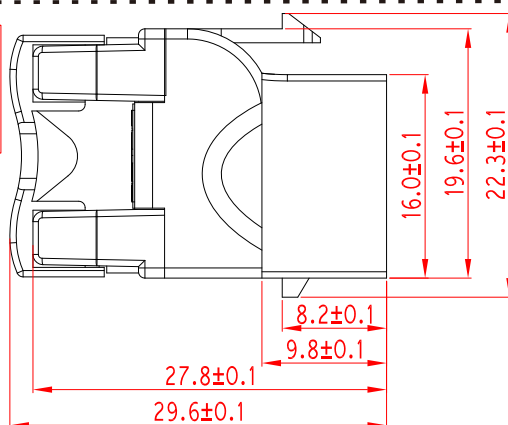

Electrical

Current Rating: 1.5 Amps
Insulation Resistance: $\geq 500 \text{ M}$
Contact Resistance: $\leq 10 \text{ m}\Omega$
DC Resistance: $\Omega \leq 0.1$
DC/AC Volt Endurance: DC1000V/AC750V 1min

Mechanical




Plug Insertion Life ≥ 750 Cycles WITH FCC COMPLIANT RJ-45 PLUG
Plug & Jack Contact Force ≥ 100 Grams WITH FCC COMPLIANT RJ-45 PLUG
Plug Retention Force: $\geq 11 \text{ lbf}$
DURABILITY : 200 TERMINATION CYCLES
OPERATING TEMPERATURE : $-10 \sim 60^\circ\text{C}$
OPERATING HUMIDITY : 10%~90%RH
STORAGE TEMPERATURE : -40°C TO 68°C

Physicals


Plastic Parts: High impact flame retardant plastic,
UL 94V-2 or 94V-0 rated
PCB: FR-4, 1.2mm Thickness
Jack Wire: 0.35 mm Phosphor bronze gold over nickel plating
IDC CONDUCTOR : 0.5mm Phosphor bronze, tin-plating
CONTACT COMPATIBILITY :
ACCOMMODATES 26 TO 23AWG SOLID

Standards Verification


ANSI/TIA-568-C.2 ;
ISO/IEC 11801 :2002/Amd.2:2010 ;
YD/T 926.3-2009 ;
ISO/IEC 60603-7 COMPLIANT ;
RoHS directive 2002/95/EC compliant

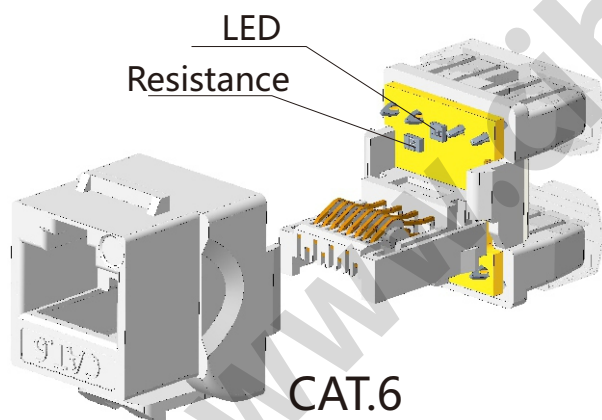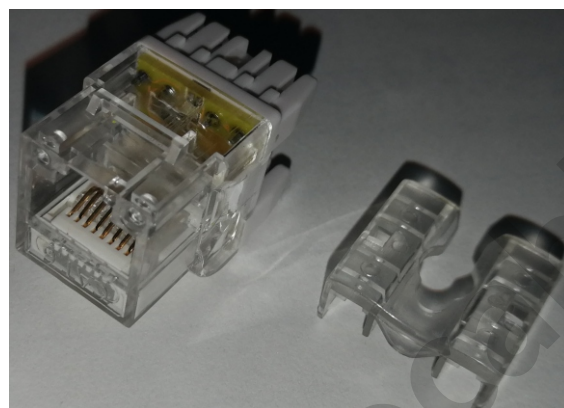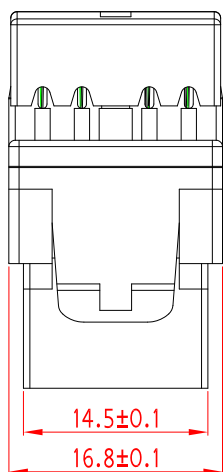

CAT.6

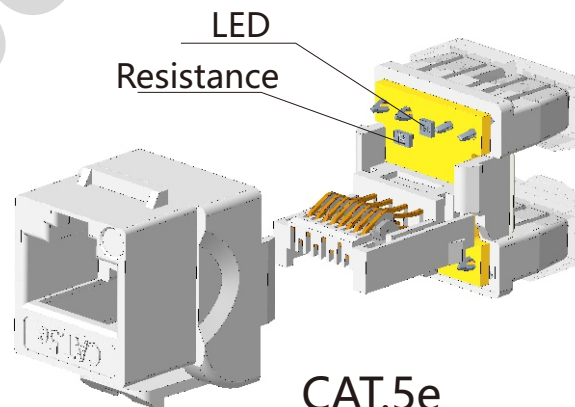

CAT.5e

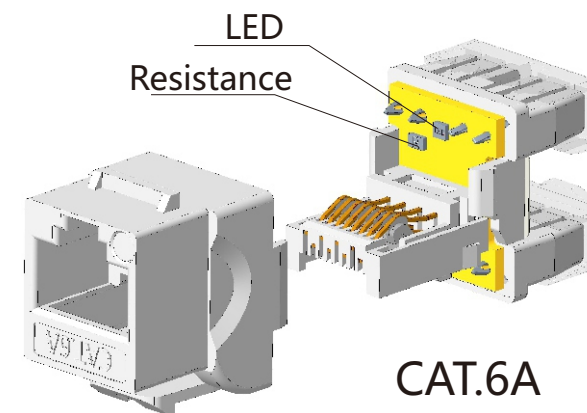

CAT.6A