



## Mini Size 180Degree unshielded keystone jack , Cat5e/Cat.6/Cat.6A available, Toolless

### Presentation

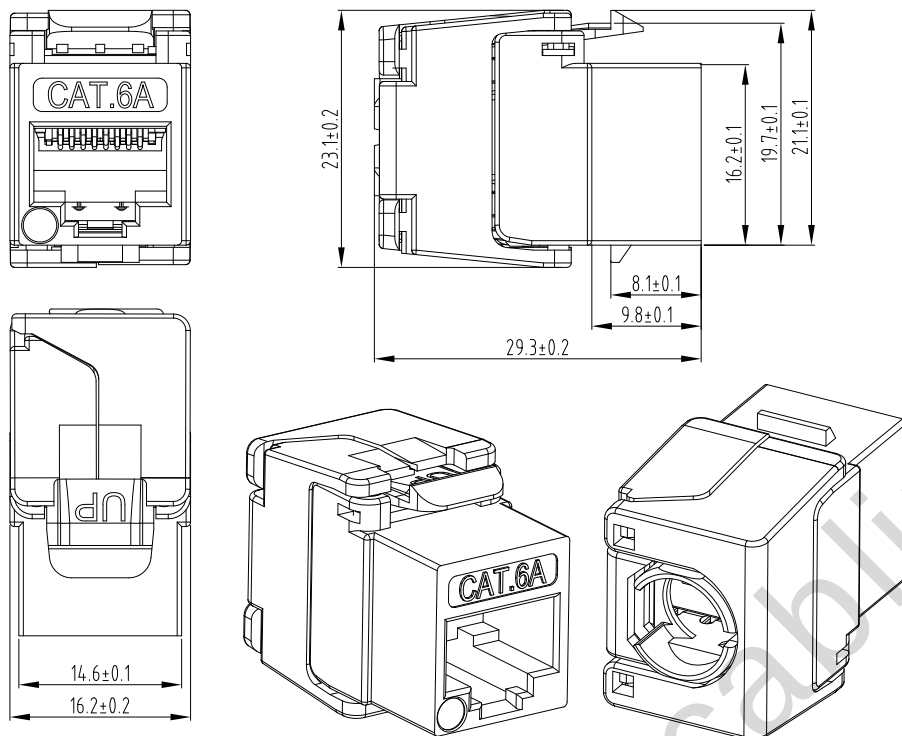

### Photo

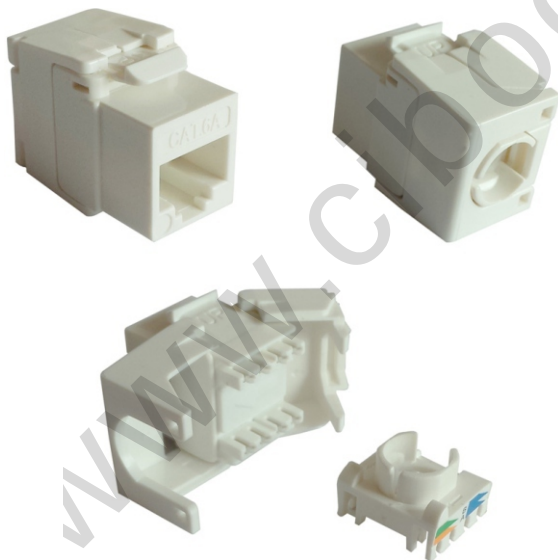

### Electrical

|                        |                     |
|------------------------|---------------------|
| Current Rating:        | 1.5 Amps            |
| Insulation Resistance: | ≥ 500 MΩ            |
| Contact Resistance:    | ≤ 10 mΩ             |
| DC Resistance:         | ≤ 0.1 Ω             |
| DC/AC Volt Endurance:  | DC1000V/AC750V 1min |

### Mechanical

Plug Insertion Life ≥ 750 Cycles WITH FCC COMPLIANT RJ-45 PLUG  
 Plug & Jack Contact Force ≥ 100 Grams WITH FCC COMPLIANT RJ-45 PLUG  
 Plug Retention Force: ≥ 11 lbf  
 DURABILITY : 200 TERMINATION CYCLES  
 OPERATING TEMPERATURE : -10~60°C  
 OPERATING HUMIDITY : 10%~90%RH  
 STORAGE TEMPERATURE : -40°C TO 68°C

### Physicals

Plastic Parts: High impact flame retardant plastic,  
 UL 94V-2 or 94V-0 rated  
 PCB: FR-4, 1.2mm Thickness  
 Jack Wire: 0.35 mm Phosphor bronze gold over nickel plating  
 IDC CONDUCTOR: 0.5mm Phosphor bronze, tin-plating  
 CONTACT COMPATIBILITY :  
 ACCOMMODATES 26 TO 23AWG SOLID

### Standards Verification

ANSI/TIA-568-C.2 ;  
 ISO/IEC 11801 :2002/Amd.2:2010 ;  
 YD/T 926.3-2009 ;  
 ISO/IEC 60603-7 COMPLIANT ;  
 RoHS directive 2002/95/EC compliant