



UTP Voice Panel, 50 Port

NPP-035012W-340

Presentation

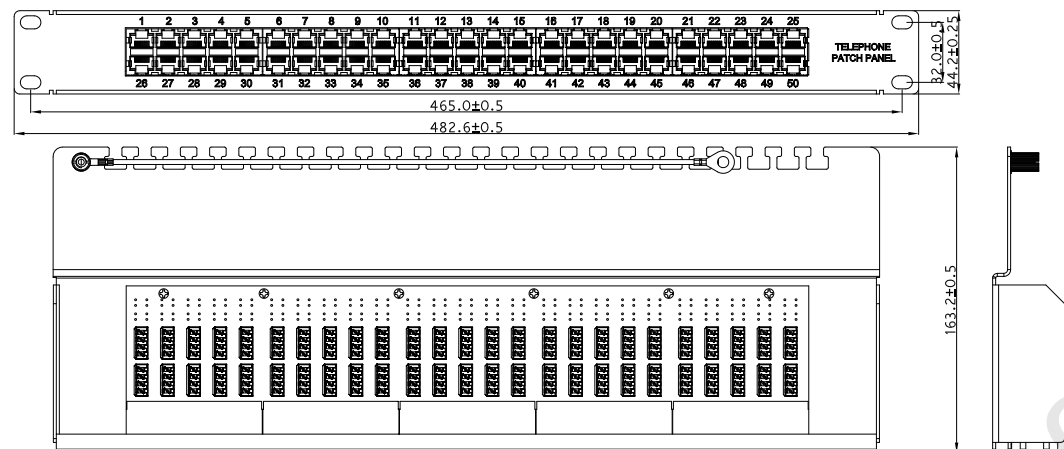

Photo

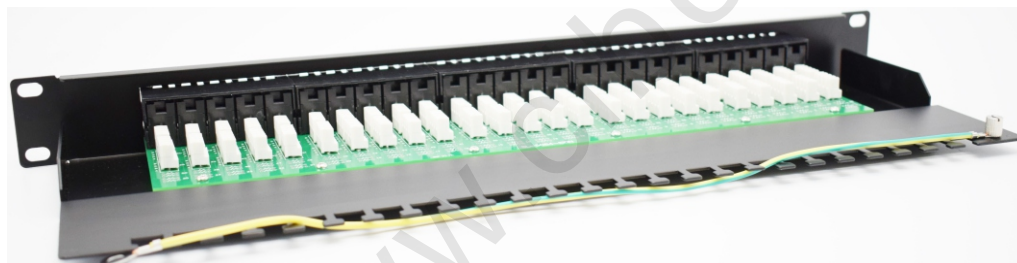

Electrical

Current Rating:	1.5 Amps
Insulation Resistance:	$\geq 500 \text{ M}\Omega$
Contact Resistance:	$\leq 20 \text{ m}\Omega$
DC Resistance:	$\leq 0.3 \Omega$
DC/AC Volt Endurance:	DC1000V/AC750V 1min

Mechanical

Mating cycles :	750 cycles minimum
Insertion force :	30N max
Retention strength :	5kg between jack and plug
IDC mating cycles :	200 cycles minimum
Operating temperature :	-10~60°C
Operating humidity :	10%~90%RH
Storage temperature :	-40°C TO 68°C

Physicals

Panel Frame:	SPCC powder coating in black color
Plastic Parts:	High quality engineering plastic
PCB:	FR-4, 1.6mm Thickness
Jack Wire:	0.35 mm Phosphor bronze gold over nickel plating
IDC conductor :	0.5mm Phosphor bronze, tin-plating
Contact compatibility :	accommodate 23 to 26 AWG solid

Standards Verification

ANSI/TIA-568.2-D;
ISO/IEC 11801 :2002/Amd.2:2010 ;
ISO/IEC 60603-7-41 compliant ;